





Alüminyum Mimari Sistemler
Aluminium Architectural Systems

MİMARİ KATALOG ARCHITECTURAL CATALOGUE

Alüminyum Kapı Pencere ve Giydirme Cephe Sistemleri
Aluminium Door Window and Facade Systems



ASAŞ

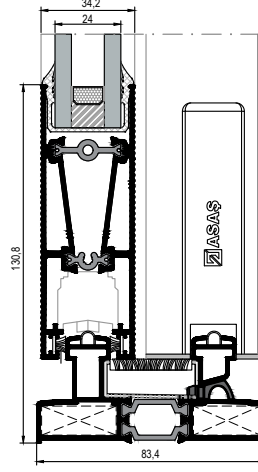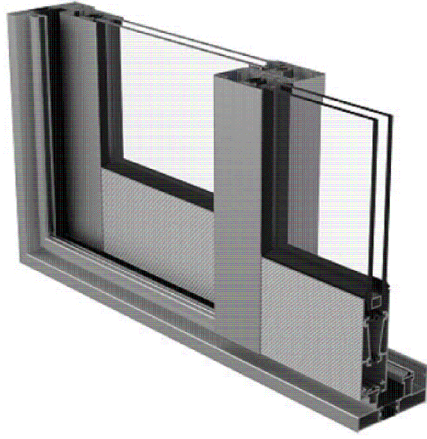

TEKNİK ÖZELLİKLERİ / TECHNICAL PROPERTIES

KASA DERİNLİĞİ / FRAME DEPTH	min.83,4mm - max.120,6mm
KANAT DERİNLİĞİ / VENT DEPTH	min.34,2mm - max.72,8mm
PROFİL ET KALINLIĞI / PROFILE WALL THICKNESS	1,4 mm
CAM KALINLIĞI / GLASS THICKNESS	8 / 10 / 20 / 24 mm
ISI BARIYERLERİ / THERMAL INSULATION BAR	14,8 / 20 / 24 mm

KULLANIM SEÇENEKLERİ / APPLICATION ALTERNATIVES

	KAPI DOOR	PENCERE WINDOW
BASİT SÜRME / SLIDING	•	•
90° KANAT BİRLEŞİMİ / 90° VENT COMBINATION	•	•
CAM ÇITALI KANAT / VENT WITH GLAZING BEAD	•	•
CAM ÇITASIZ KANAT / VENT WITHOUT GLAZING BEAD	•	•
3 RAYLI KASA / 3 RAILED FRAME	•	•
SİNEKLİK / INSECT SCREEN	•	•
SABİTLE BİRLEŞİM / COMBINATION WITH FIXED PART	•	•

PERFORMANS DEĞERLERİ / PERFORMANCE VALUES


SİSTEM UF DEĞERİ - EN 10077-2
(THERMAL INSULATION VALUE)





4,12~5,89 W/M²K

ISI YALITIM DEĞERLERİ (UF) / THERMAL INSULATION VALUE (UF):


CAM KALINLIKLARI (GLASS THICKNESS) : 20 / 24mm Cam Çıtalı

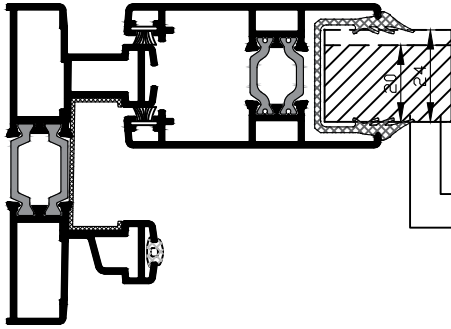



UF: 4,39 W/M²K
UF: 4,41 W/M²K

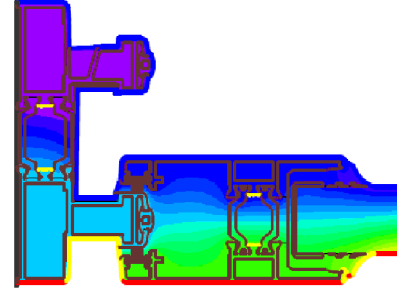


CAM KALINLIKLARI (GLASS THICKNESS) : 20 / 24mm Cam Çıtalı

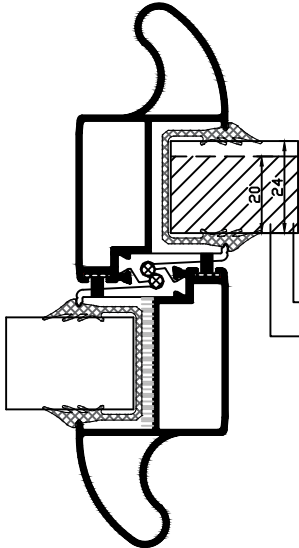



UF: 5,44 W/M²K
UF: 5,89 W/M²K

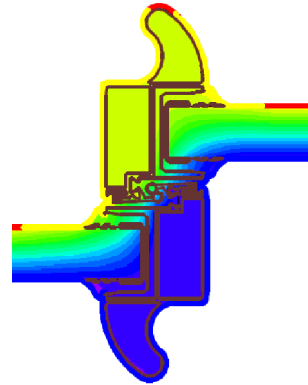

CAM KALINLIKLARI (GLASS THICKNESS) : 20 / 24mm Cam Çıtalı

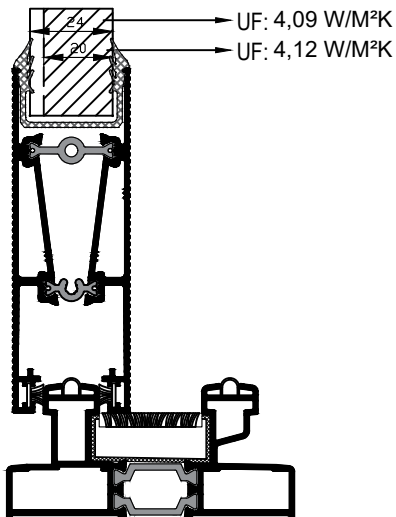


UF: 4,09 W/M²K
UF: 4,12 W/M²K


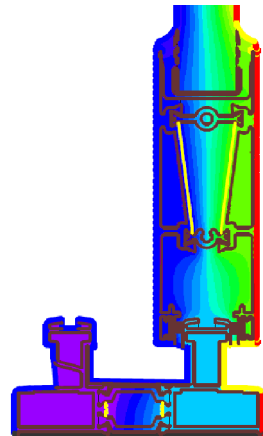


ISI YALITIM DEĞERLERİ (UF) / THERMAL INSULATION VALUE (UF):


CAM KALINLIKLARI (GLASS THICKNESS) : 24mm Cam Çıtalı

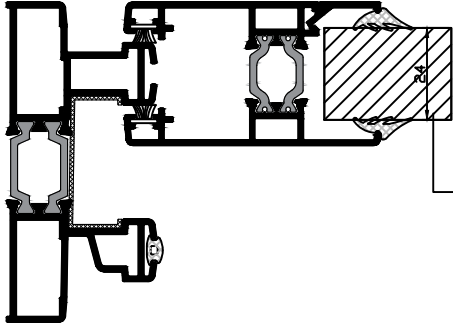



UF: 4,52 W/M²K

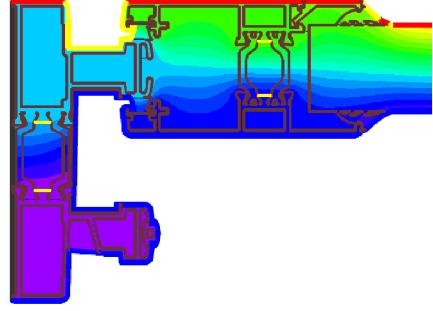


CAM KALINLIKLARI (GLASS THICKNESS) : 24mm Cam Çıtalı

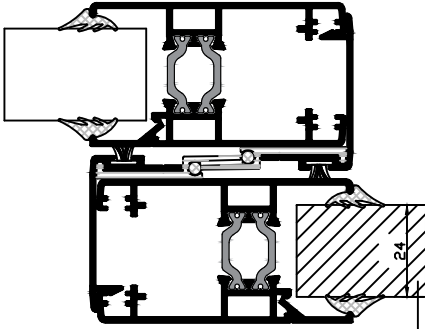

UF: 5,23 W/M²K

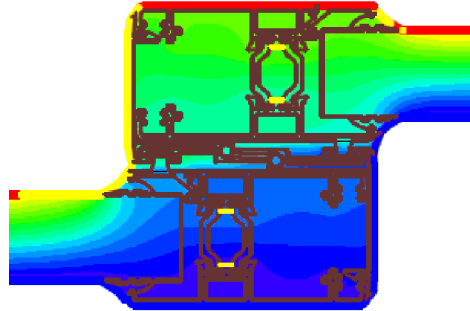

CAM KALINLIKLARI (GLASS THICKNESS) : 24mm Cam Çıtalı

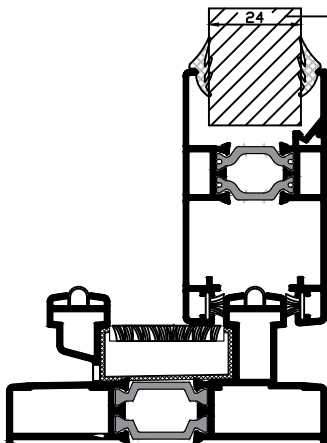

UF: 4,52 W/M²K

